

HELI


JS12

Self Propelled Scissor
Type Aerial Work Platform



Manufacturer's Data and Design Characteristics

Manufacture		HELI							
1.1	Model		JS0812	JS0812E	JS1012	JS1012E	JS1212	JS1212E	
	Dimension								
2.1	Max. working height	A1	m	10	10	12	12	13.9	13.9
2.2	Max. platform height	A2	m	8	8	10	10	11.9	11.9
2.3	Overall length	B	m	2.4	2.4	2.4	2.4	2.4	2.4
2.4	Overall width	C	m	1.15	1.15	1.15	1.15	1.15	1.15
2.5	Overall height (guardrail unfolded)	D	m	2.3	2.3	2.46	2.46	2.60	2.60
2.6	Overall height (guardrail folded)		m	1.71	1.71	1.84	1.84	1.98	1.98
2.7	Platform size (length x width)	E x F	m	2.25x1.15	2.25x1.15	2.25x1.15	2.25x1.15	2.25x1.15	2.25x1.15
2.8	Guardrail height	G	m	1.1	1.1	1.1	1.1	1.1	1.1
2.9	Extension size of platform	H	m	1	1	1	1	1	1
2.10	Ground clearance (retracted state)	I	mm	95	95	95	95	95	95
2.11	Ground clearance (lifting state)	J	mm	20	20	20	20	20	20
2.12	Wheelbase	K	m	1.85	1.85	1.85	1.85	1.85	1.85
	Performance								
3.1	Max. number of workers (indoor / outdoor)			2/1	2/1	2/1	2/1	2/-	2/-
3.2	Rated capacity		kg	450	450	320	320	320	320
3.3	Rated capacity of extension platform		kg	120	120	120	120	120	120
3.4	Drive speed (retracted state)		km/h	0-3.2	0-3.2	0-3.2	0-3.2	0-3.2	0-3.2
3.5	Drive speed (lifting state)		km/h	0-0.8	0-0.8	0-0.8	0-0.8	0-0.8	0-0.8
3.6	Min. turning radius (inside)		m	0	0	0	0	0	0
3.7	Min. turning radius (outside)		m	2.2	2.2	2.2	2.2	2.2	2.2
3.8	Lifting/Falling time		s	32/35	32/35	52/48	52/48	52/52	52/52
3.9	Max. work slope (forward and backward / left and right)		°	3°/1.5°	3°/1.5°	3°/1.5°	3°/1.5°	3°/1.5°	3°/1.5°
3.10	Max. allowable wind speed (indoor / outdoor)		m/s	0/12.5	0/12.5	0/12.5	0/12.5	0/0	0/0
3.11	Max. allowable lateral force (indoor / outdoor)		N	400/200	400/200	400/200	400/200	400/0	400/0
3.12	Gradeability		%	30%	30%	25%	30%	25%	30%
3.13	Control type			Proportional control	Proportional control	Proportional control	Proportional control	Proportional control	Proportional control
3.14	Drive			Dual front wheels	Dual front wheels	Dual front wheels	Dual front wheels	Dual front wheels	Dual front wheels
3.15	Brake			Dual rear wheels	Dual rear wheels	Dual rear wheels	Dual rear wheels	Dual rear wheels	Dual rear wheels
3.16	Tyre size		mm	381x129	381x129	381x129	381x129	381x129	381x129
	Power								
4.1	Lifting / driving motor power		kw	3.3	3.3/0.7x2	3.3	3.3/0.7x2	4.5	3.3/0.7x2
4.2	Battery voltage / capacity		V/Ah	6x4/225	6x4/225	6x4/225	6x4/225	12x4/300	12x4/300
4.3	Charger input voltage		VAC	100-240	100-240	100-240	100-240	100-240	100-240
4.4	Charger output current		A	36	36	36	36	36	36
4.5	Control voltage		VDC	24	24	24	24	24	24
	Weight								
5.1	Overall weight		kg	2460	2460	2820	2820	2820	2950

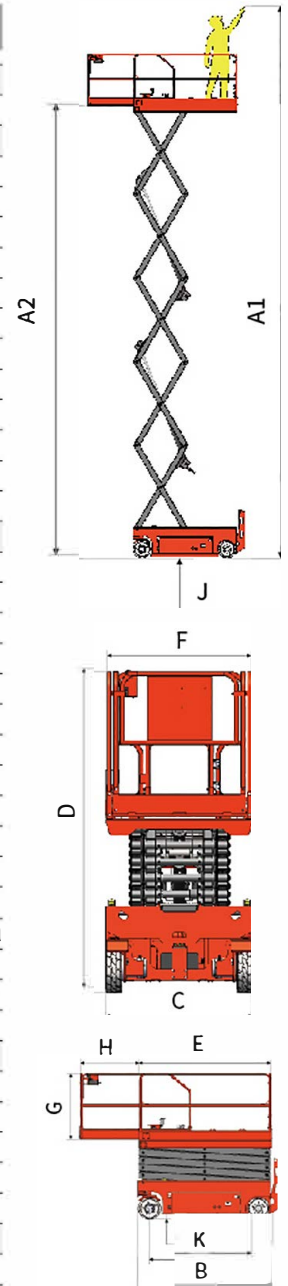

Standard configurations

Proportional control	Extension platform	Emergency stop device	Intelligent danger alarm	Working timer	Emergency falling system	Automatic brake system	Action buzzer	Repair safety arm
Manual brake release	Automatic fault diagnosis	Folding guardrail	Charging action interlock	Auto-protection on holes on the ground	Working strobe warning light	Oil pipe explosion proof system	Anti-pinch system	Standard transport on truck hole

Optional configurations

AC power to platform	Lithium battery	Platform anti-collision device	Pneumatic pipe to platform	Generator to platform	Intelligent interlock	Folding guardrail	Safety pedal switch	Platform working light
----------------------	-----------------	--------------------------------	----------------------------	-----------------------	-----------------------	-------------------	---------------------	------------------------



Repair safety arm



Split explosion proof valve



Rotary maintenance pallet



Small turning radius



Auto-protection on holes on the ground



Strong climbing ability



Emergency falling and dual flashing warning lights

HELI

LIFTING THE FUTURE

heliforklifts.co.nz

Contact us direct or get in touch with your local dealer

0800 435 469
sales@heliforklifts.co.nz